




ARCONIC

The New Huck® 316 (A4) Stainless Steel Magna-Lok®

Engineered for superior corrosion resistance

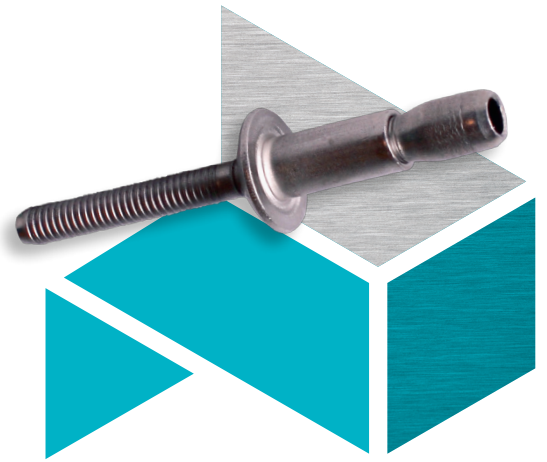

Features and Benefits

COMBINED WITH ALL THE BENEFITS OF USING A HUCK MAGNA-LOK



WIDE GRIP RANGE

Accommodates large variations in joint thickness



EXCELLENT GAP CLOSURE CAPABILITY



FLUSH PINBREAK

No catching on clothes, skin or goods. Quick and easy visual inspection



INTERNAL PIN LOCKING MECHANISM

Secure within the rivet body and protected from corrosion



OUTSTANDING HOLE FILLING ON THE BLIND SIDE


Excellent joint tightness and resistant to water ingress*

Strength, Grip Range and Hole Dimension Information

PRODUCT CODE	HEAD STYLE	F MAX (mm)	MIN. GRIP (mm)	MAX. GRIP (mm)	SHEAR (kN) Min. Val.	TENSILE (kN) Min. Val.	PIN RETENTION (kN)	MIN. HOLE DIA (mm)	MAX. HOLE DIA (mm)
MGLP-316U8-6	Protruding	25.27	2.03	9.53	10.5	8.0	0.88	6.62	6.90
MGLP-316U8-10	Protruding	31.62	8.89	15.88	10.5	8.0	0.88	6.62	6.90

Tooling Required

TYPE	TOOL	NOSE ASSEMBLY	HUCKFORCE RANGE	HOSE SET
Hydraulic	2480L	99-3305L	HK32-002	3.64 m
Pneumatic	202V / 2025LB	99-3305 / 993305L	Not applicable	Not applicable

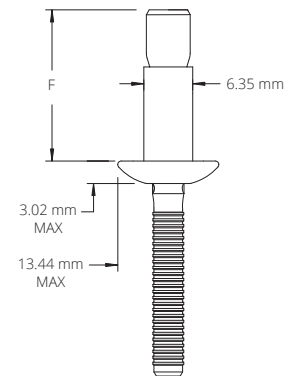

MARKETS

- Marine
- Tank manufacturers
- Off-shore equipment
- Food industry
- Medical equipment
- Chemical storage

Disclaimer: * Individual fastener benefits will vary depending on the application they are used in. Please discuss with your AFSR Customer Manager prior to fastener choice. The information contained in this publication is only for general guidance with regard to properties of the products shown and/or the means for selecting such products and is not intended to create any warranty, express, implied, or statutory; all warranties are contained only in AFSR's written quotations, acknowledgements, and/or purchase orders. It is recommended that the user secures specific, up-to-date data and information regarding each application and/or use of such products.

